


# SINGLE PHASE INDUSTRIAL VACUUMS



# PERFORMANCE ON VACUUM SOLUTIONS SINCE 1972

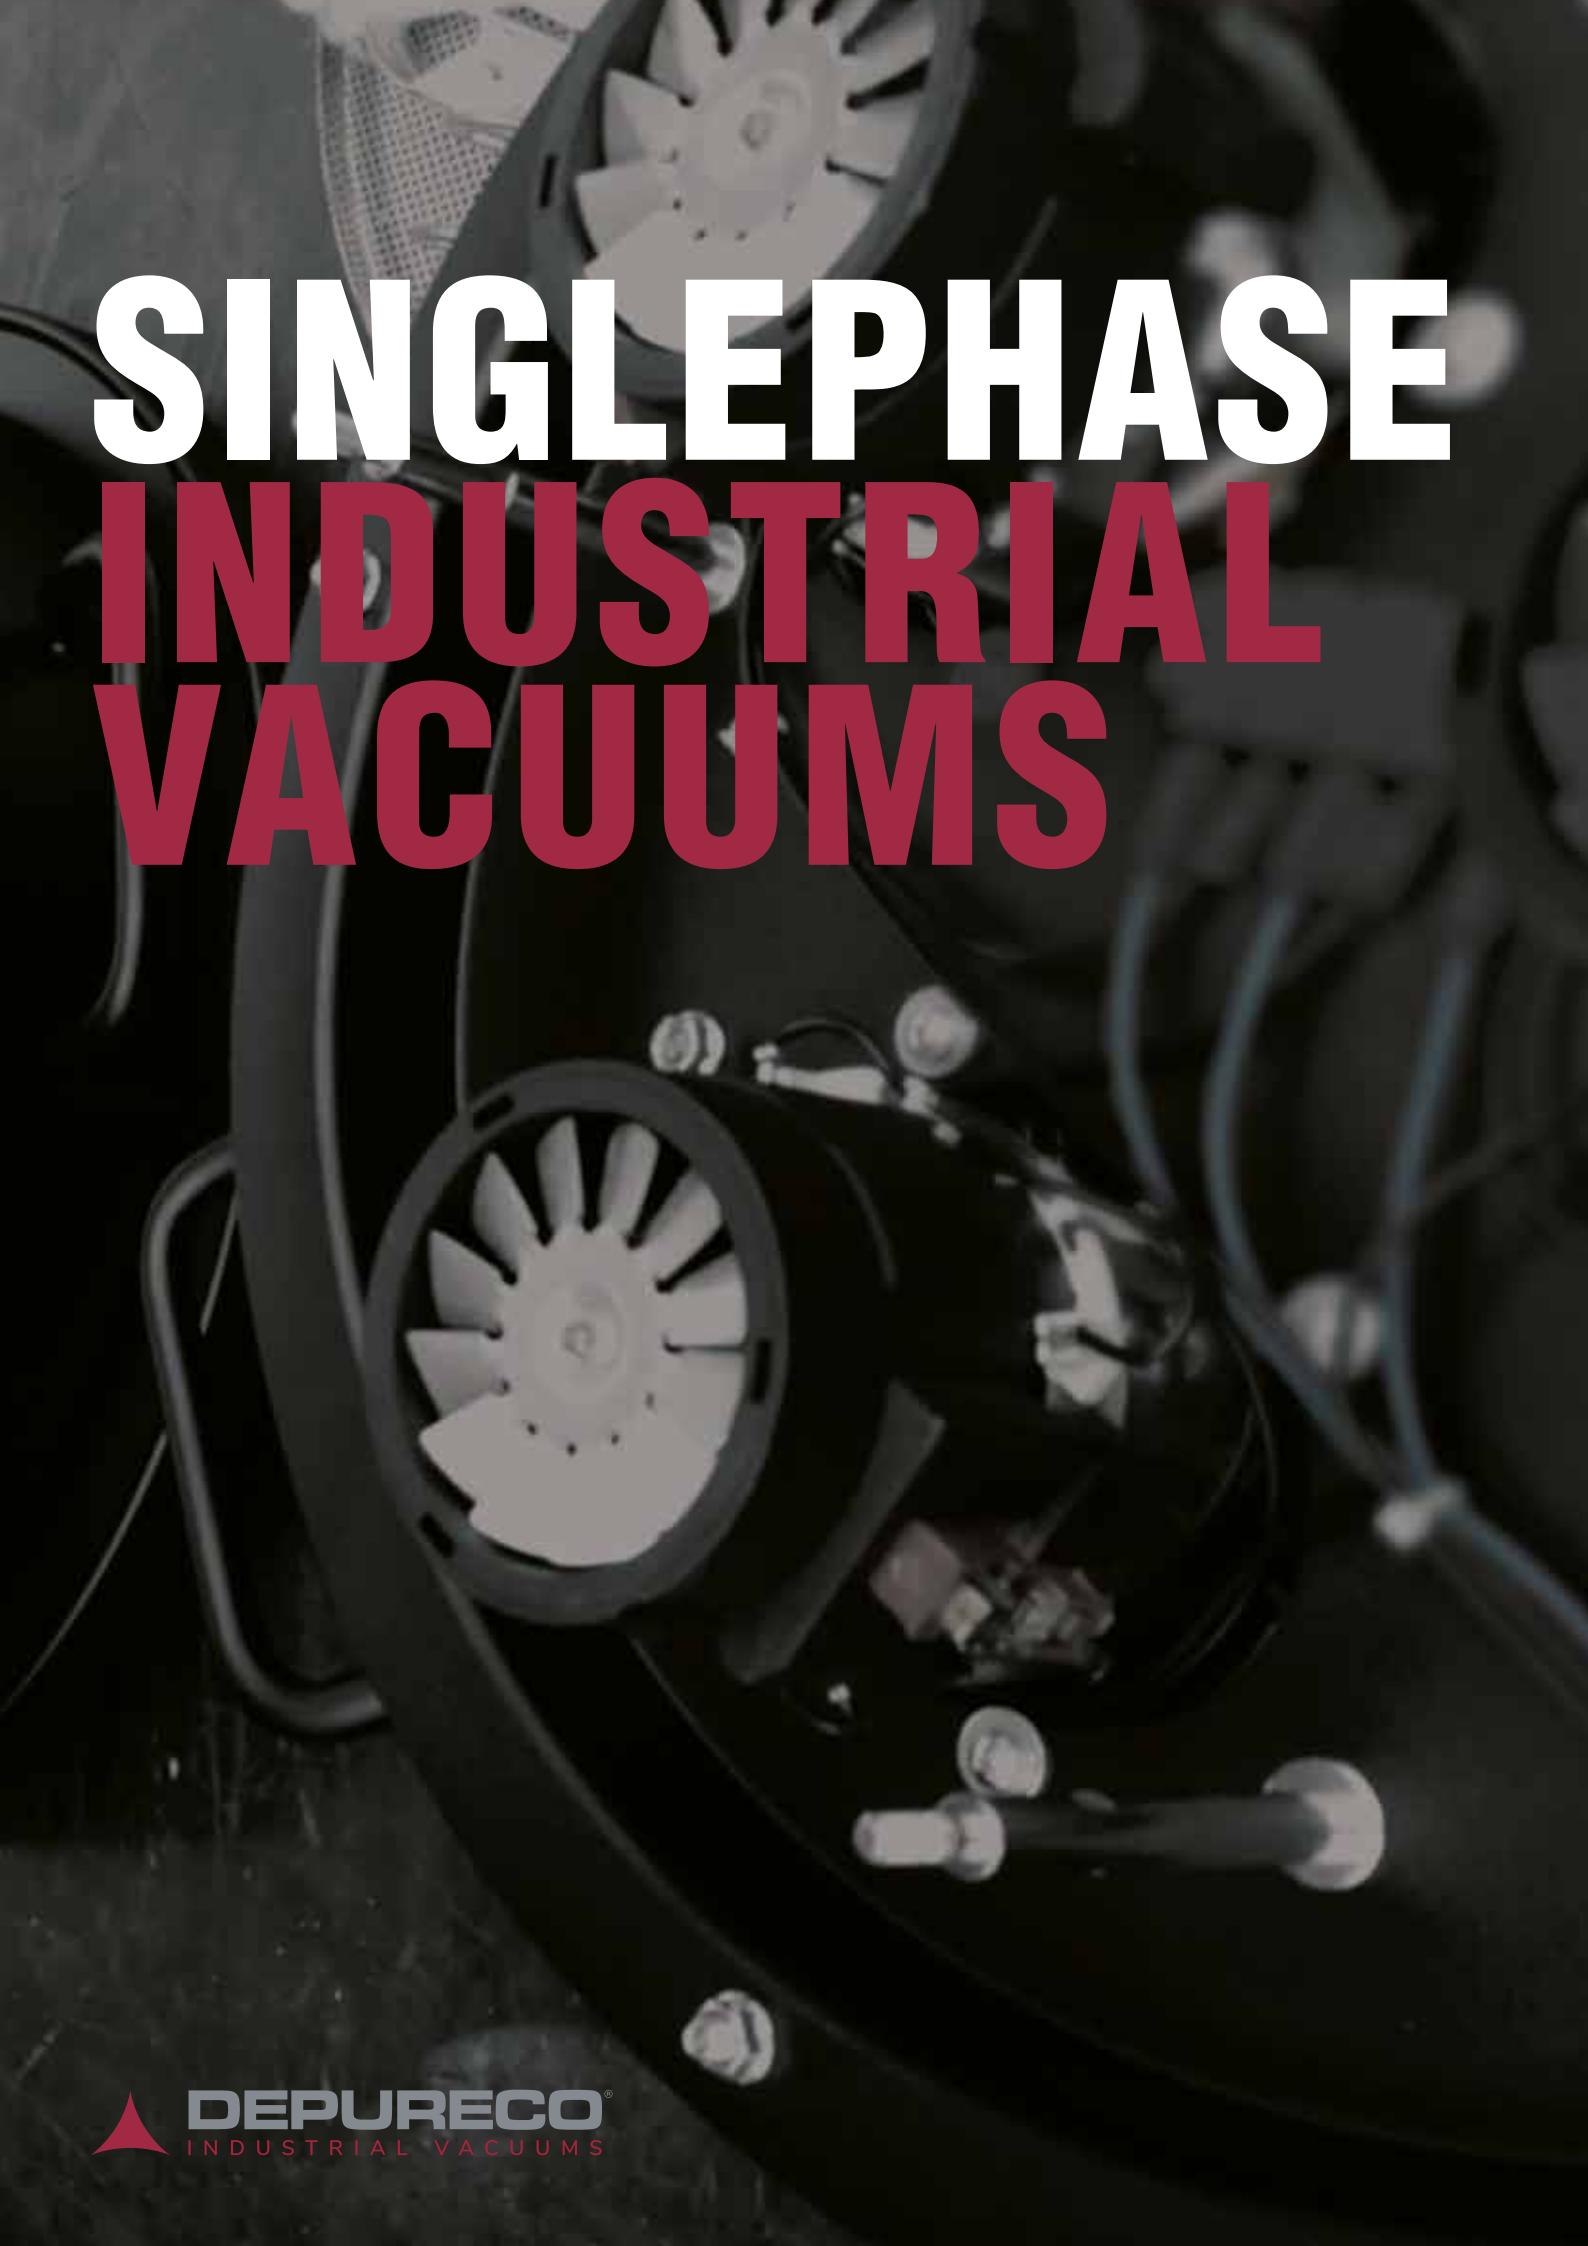

**POWER**  
**RELIABILITY**  
**SAFETY**

# POWER & RELIABILITY



# ADVANTAGES

MAXIMUM POWER 3,9 KW

BY-PASS COOLING SYSTEM

INDEPENDENT SWITCHES

Suitable for every need, the by-pass motors installed by Depureco are powerful and reliable. Thanks to their independent cooling system they can work in the most demanding conditions. Dust, swarf, oil and every type of liquid are quickly vacuumed, even with several meters long hoses. The three-motors version is the most powerful in its category and can reach outstanding performances.

UP TO 3 MOTORS TO REACH  
THE UTMOST PERFORMANCES



# THE RIGHT FILTER FOR EVERY CIRCUMSTANCE

## POCKET FILTER



### STANDARD M CLASS FILTER

FINE DUST, GRANULES, SOLID AND DRY SWARF



### M CLASS TEFLON FILTER

FINE DUST, GRANULES, WET OR DUMP SWARF AND SOLID MATERIALS. ESPECIALLY SUITABLE FOR STICKY DUST.



### M CLASS ANTISTATIC FILTER

FINE DUST, GRANULES, SWARF AND SOLID MATERIALS THAT TEND TO BECOME ELECTROSTATICALLY CHARGED. STANDARD ON THE MODELS IN THE ATEX RANGE.



### M CLASS PTFE FILTER

VERY FINE AND STICKY DUST, HYGROSCOPIC AND WET MATERIALS. FOOD CERTIFIED



### NOMEX FILTER

DUST AND SOLID MATERIALS WITH TEMPERATURES UP TO 250°C.



### M CLASS ANTISTATIC PTFE FILTER

HYGROSCOPIC MATERIALS THAT TEND TO BECOME ELECTROSTATICALLY CHARGED. STANDARD ON MODELS IN THE ATEX RANGE. FOOD CERTIFIED.

## FILTER FOR THE JETCLEAN SYSTEM



M CLASS - FILTRATION EFFICIENCY 1 $\mu$  (EN60335269)

FILTER SURFACE UP TO 35.000 cm<sup>2</sup>

JETCLEAN® FILTER CLEANING SYSTEM


ANTISTATIC POLYESTER ALUMINATED FILTER

ESPECIALLY SUITED FOR DRY, FINE AND VERY FINE DUST



CLASS H14 EN - 1822  
EFFICIENCY 99,995% VERY FINE, DANGEROUS DUST  
WITH GRANULOMETRY <1 $\mu$

## ABSOLUTE FILTER

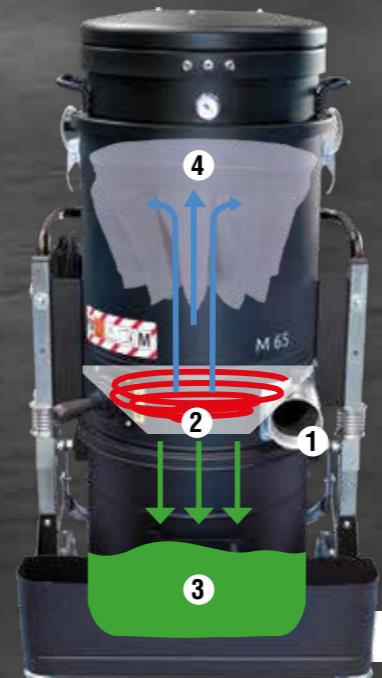

THE MATERIAL ENTERS THE CHAMBER FROM THE SUCTION INLET (1) AND THANKS TO THE CYCLONE (2) IT LOSES SPEED, SETTLING INSIDE THE VACUUM'S BIN (3). THIS WAY 90% OF THE MATERIAL IS CLEARED, GRANTING A LONGER LIFE FOR THE FILTER.


## THE CYCLONE



## STANDARD M CLASS FILTER

THE M CLASS FILTER HAS A FILTRATION EFFICIENCY OF 1 $\mu$ , ALLOWING TO VACUUM EVEN FINER DUST IN COMPLETE SAFETY

# THE TRICK IS CLEANING THE FILTER!

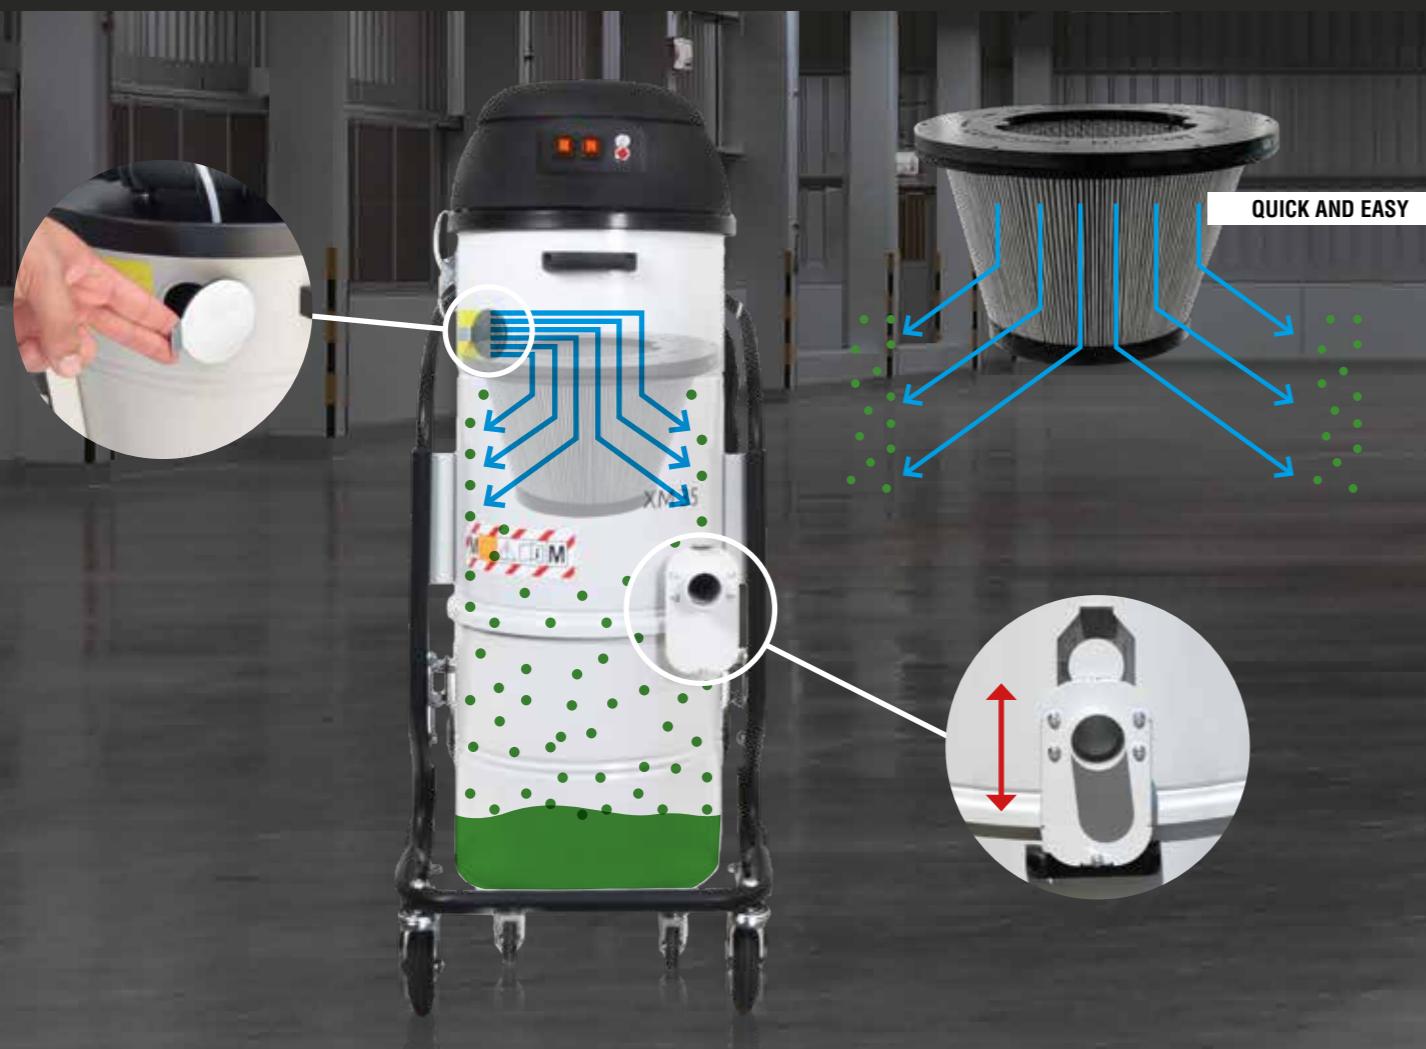

## JETCLEAN® SYSTEM

IT CLEANS THE FILTER WITHOUT STOPPING THE VACUUMING

INCREASED CLEANING EFFICIENCY UP TO 30% HIGHER

IDEAL FOR FINE AND DIFFICULT DUST



## MANUAL FILTER SHAKER

IDEAL FOR DRY AND HUMID DUST

EXCELLENT TO REMOVE SWARF AND SOLID MATERIALS FROM THE FILTER

PRACTICAL AND CHEAP SYSTEM

# VACUUM CLEANERS WITH JETCLEAN® SYSTEM

COMPACT  
DURABLE  
SAFE

- Semi-Automatic filter cleaning system
- All the filters are certified M Class
- Up to 3 motors
- Powerful, Compact and Durable
- Ideal for fine and dry dust
- Practical Detachable Bin
- Up To 100 Lt Capacity
- Available With Longopac®



	XM 20 JETCLEAN	XM 35 JETCLEAN	XM 35 JETCLEAN LP	M 65 JETCLEAN	M 100 JETCLEAN LP
<b>MOTORS</b>	2	2	2	3	3
<b>POWER</b>	<b>kW-HP</b> 2,6 - 3,5	<b>kW-HP</b> 2,6 - 3,5	<b>kW-HP</b> 2,6 - 3,5	<b>kW-HP</b> 3,9 - 5,2	<b>kW-HP</b> 3,9 - 5,2
<b>VOLTAGE   FREQUENCY</b>	<b>V Hz</b> 230 / 50-60				
<b>MAXIMUM VACUUM</b>	<b>mBar</b> 250				
<b>MAXIMUM AIR FLOW</b>	<b>m³/h</b> 380	<b>m³/h</b> 380	<b>m³/h</b> 380	<b>m³/h</b> 570	<b>m³/h</b> 570
<b>INLET</b>	<b>Ø mm</b> 50				
<b>FILTER SURFACE</b>	<b>cm²</b> 35.000				
<b>CAPACITY</b>	<b>Lt</b> 20	<b>Lt</b> 45	LONGOPAC®	<b>Lt</b> 65/100	LONGOPAC®



CONICAL FILTER CARTRIDGE

WITH STANDARD M CLASS FILTER AND  
SEMI-AUTOMATIC JETCLEAN® FILTER  
CLEANING SYSTEM



ABSOLUTE FILTER

AVAILABLE FOR THE  
WHOLE RANGE



SLIDING DAMPER

AVAILABLE FOR  
ALL MODELS



UP TO THREE YEARS  
WARRANTY

# VACUUM CLEANERS WITH POCKET FILTER

POWERFUL

VERSATILE

RELIABLE

- Manual Filter Shaker
- All the Filters are certified M Class
- Up to 3 motors
- Sturdy, Safe, suitable for every need
- Ideal for Dust, Granules and Swarf
- Practical detachable Bin
- Up To 100 Lt Capacity
- Available With Longopac®



## MINIBULL

MOTORS	2	
POWER	kW-HP	2,6 - 3,5
VOLTAGE   FREQUENCY	V Hz	230 / 50 - 60
MAXIMUM VACUUM	mBar	250
MAXIMUM AIR FLOW	m <sup>3</sup> /h	380
INLET	Ø mm	70
FILTER SURFACE	cm <sup>2</sup>	15.000
CAPACITY	Lt	45

## M 65 / 100

kW-HP	3
V Hz	3,9 - 5,2
mBar	230 / 50 - 60
m <sup>3</sup> /h	250
Ø mm	570
cm <sup>2</sup>	70
Lt	24.000 / 38.000

## BULL UNO 2 M / 3M

2 / 3	
kW-HP	2,6 - 3,5 / 3,9 - 5,2
V Hz	230 / 50 - 60
mBar	250
m <sup>3</sup> /h	380 / 570
Ø mm	80
cm <sup>2</sup>	24.000 / 38.000
Lt	65 / 100



STANDARD M CLASS POCKET FILTER  
SUITABLE FOR EVERY NEED

STANDARD M CLASS ANTISTATIC    NOMEX    M CLASS ANTISTATIC    PTFE    PTFE ANTISTATIC



ABSOLUTE FILTER  
AVAILABLE FOR THE  
WHOLE RANGE



## SP SYSTEM

AUTOMATIC REVERSE AIR JET  
FILTER CLEANING. AVAILABLE  
ON DEMAND.

3  
YEARS  
WARRANTY

UP TO THREE YEARS  
WARRANTY

# WD VACUUM CLEANER FOR LIQUIDS

	WD 132	WD 132 P	WD 133	
<b>MOTORS</b>	2	2	3	
<b>POWER</b>	<b>kW-HP</b>	2,6-3,5	2,6 - 3,5	3,9 - 5,2
<b>VOLTAGE   FREQUENCY</b>	<b>V Hz</b>	230/50-60	230/50-60	230/50-60
<b>MAXIMUM VACUUM</b>	<b>mBar</b>	250	250	250
<b>MAXIMUM AIR FLOW</b>	<b>m<sup>3</sup>/h</b>	380	380	570
<b>INLET</b>	<b>Ø mm</b>	70	70	70
<b>CAPACITY</b>	<b>Lt</b>	130	130	130
<b>DISCHARGE SYSTEM</b>		discharge by gravity	automatic discharge by pump	discharge by gravity

FLOATING SYSTEM      STANDARD FILTER FOR LIQUIDS      STANDARD FILTER FOR DUST



FIXED VACUUMING TOOL



BIN EMPTYING KIT



LONGOPAC® SEPARATOR



WET & DRY SEPARATOR



TLTABLE 580 LT SEPARATOR

CONVENIENT SOLUTIONS TO  
HELP YOU WITH YOUR WORK

THE RIGHT ACCESSORY FOR EVERY NEED



DOUBLE BEND TUBE  
FOR FLOOR BRUSH



FLOOR BRUSH  
WITH BRISTLES



FLOOR SQUEEZE WITH  
RUBBER STRIPS



SCRAPING PIPE



PIPE WITH HANDLE



ANTISTATIC RUBBER  
CONIC SECTION



OIL PROOF  
CONIC SECTION



SILICONE CONIC  
SECTION



ANTISTATIC  
SWEEPER NOZZLE



ANTISTATIC  
BRUSH  
WITH BRASS BRISTLES



ANTISTATIC RUBBER BRUSH  
WITH BRASS BRISTLES



PVC ROUND BRUSH



ANTISTATIC BENT  
RUBBER CONE



PIPE CLEANING BRUSH



ANTISTATIC FLAT PIPE

# BATTERY POWERED VACUUM CLEANER

	BULL 24	FOX 24	
<b>MOTORS</b>	3	3	
<b>POWER</b>	<b>kW-HP</b>	1,5/2	1,5/2
<b>VOLTAGE   FREQUENCY</b>	<b>V</b>	24	24
<b>MAXIMUM VACUUM</b>	<b>mBar</b>	240	240
<b>MAXIMUM AIR FLOW</b>	<b>m<sup>3</sup>/h</b>	350	350
<b>INLET</b>	<b>Ø mm</b>	80	80
<b>BATTERY</b>	<b>N°</b>	2	4
<b>UPTIME</b>	<b>h</b>	1	2




BLACK EVAFLEX HOSE



BLACK EVAFLEX  
ELECTROCONDUCTIVE HOSE



POLYURETHANE  
FLEXIBLE HOSE




REINFORCED ABRASIVE PROOF  
POLYURETHANE FLEXIBLE HOSE



ANTISTATIC POLYURETHANE  
FLEXIBLE HOSE

FLEXIBLE HOSES FOR ALL MATERIALS

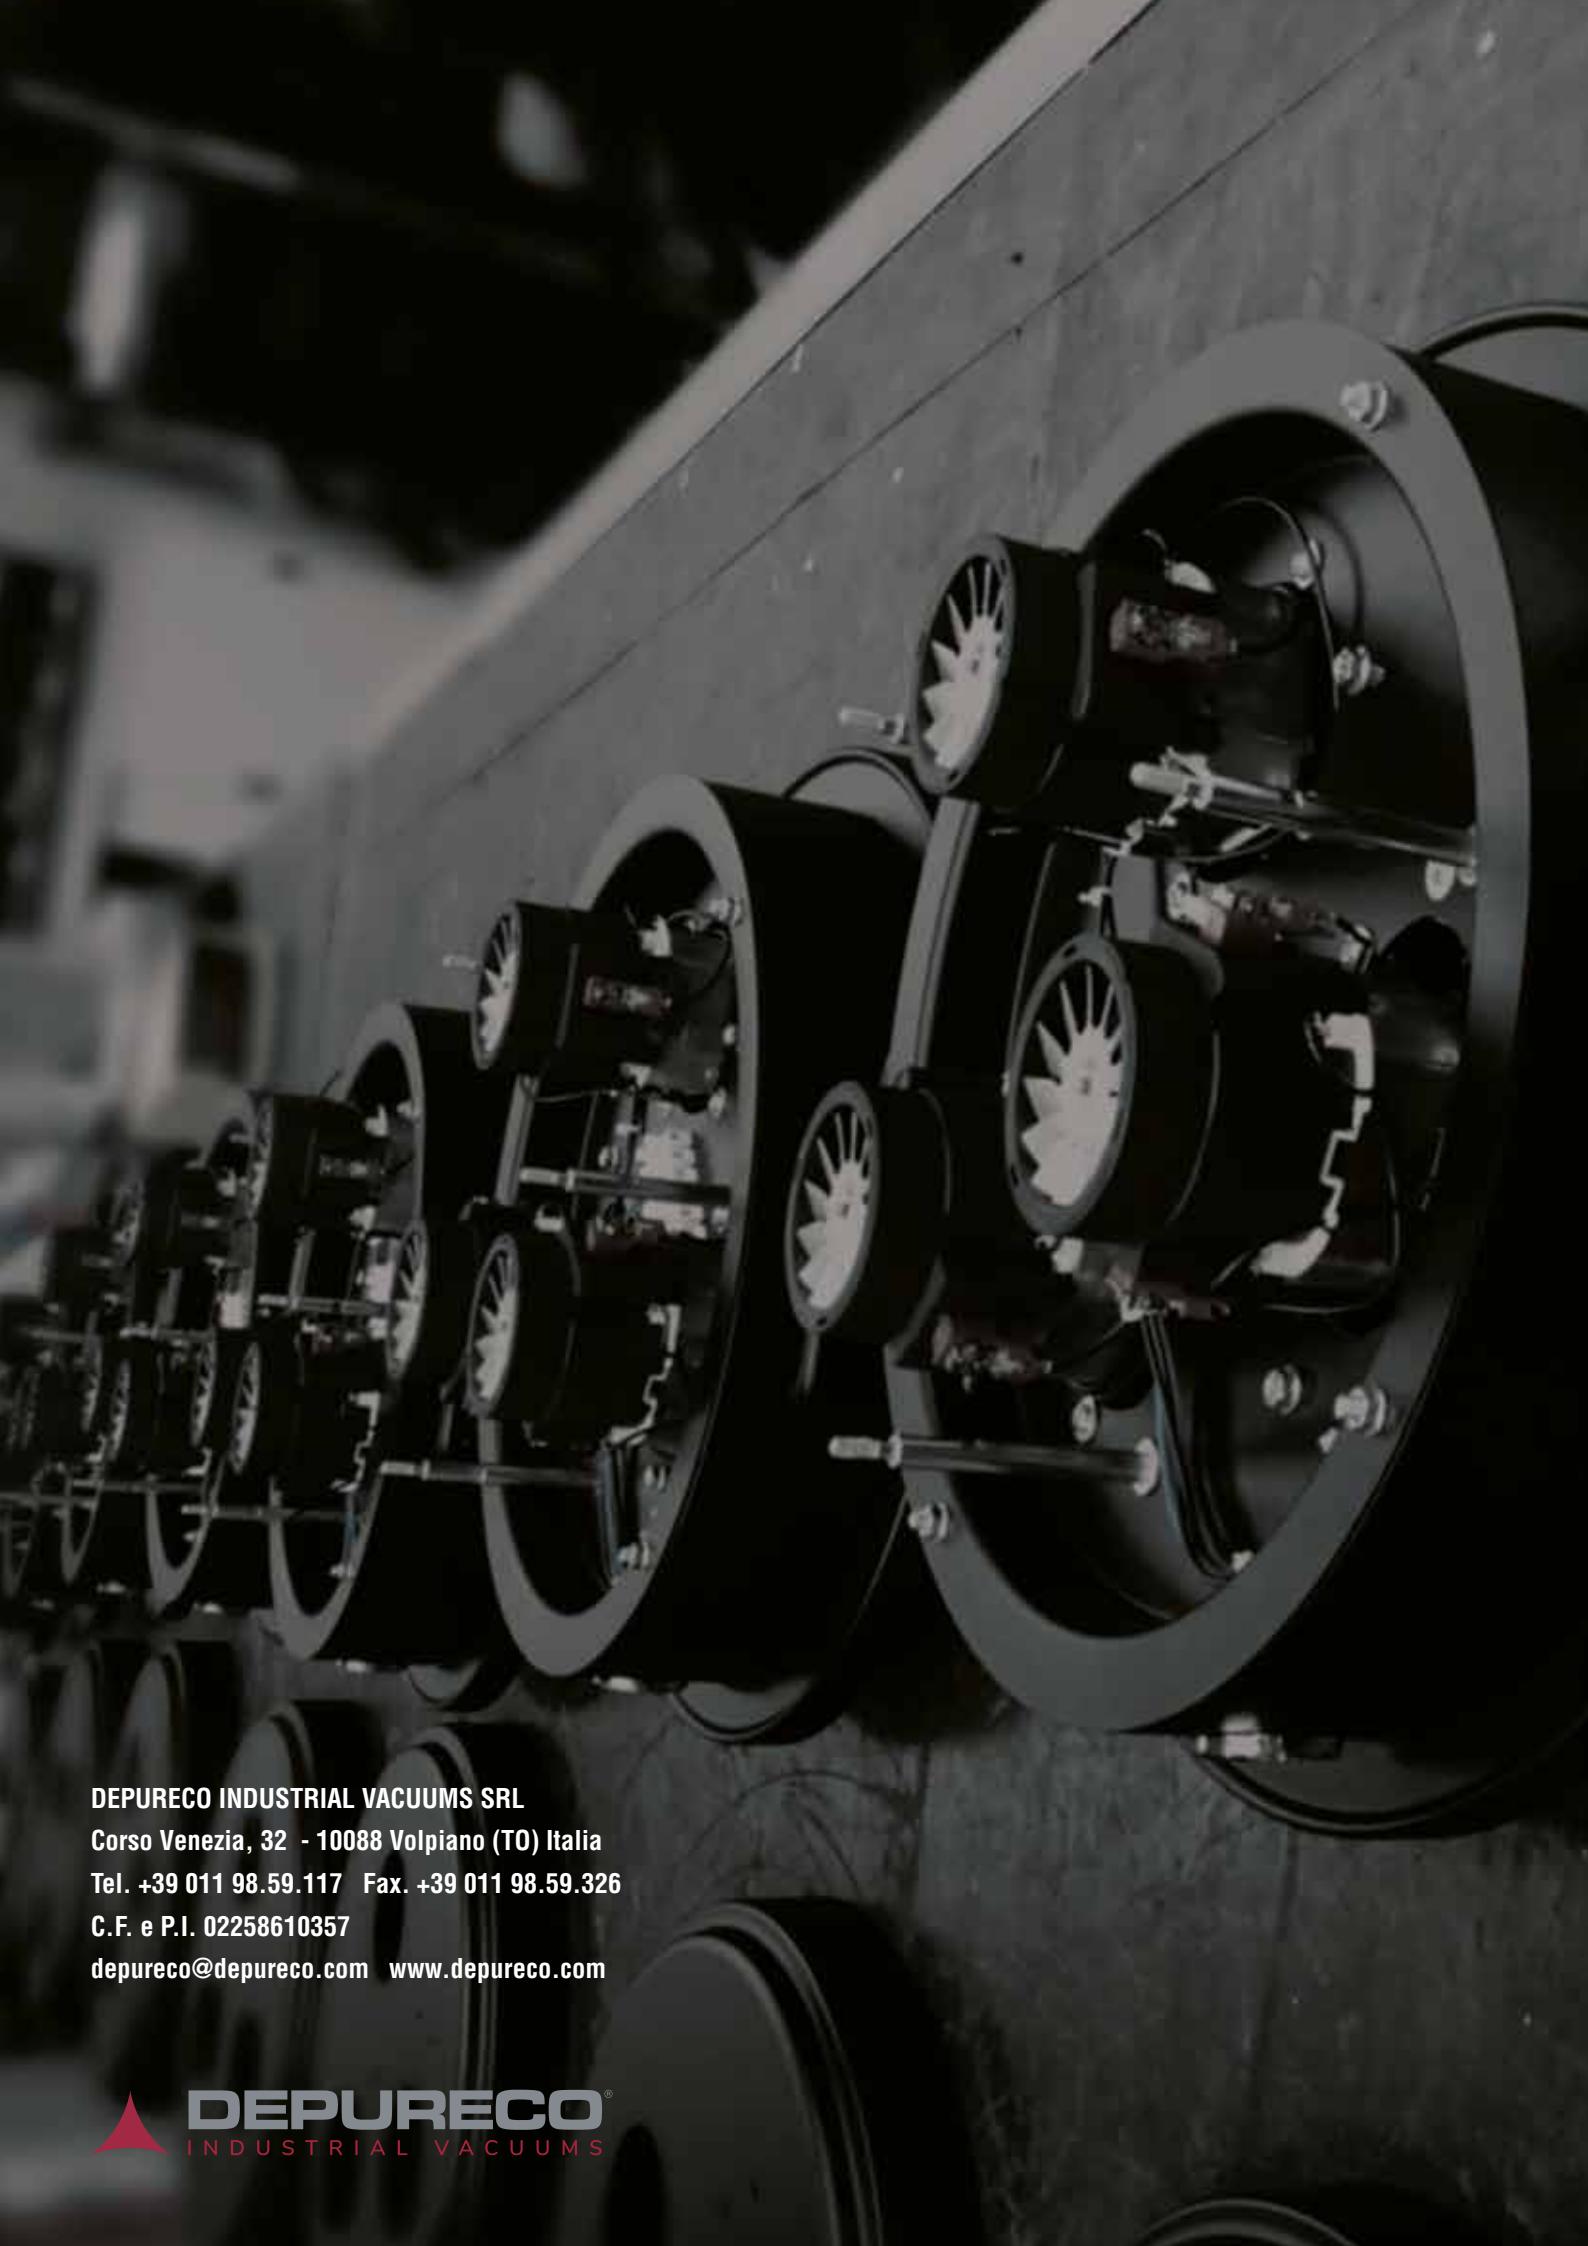

**DEPURECO INDUSTRIAL VACUUMS SRL**

Corso Venezia, 32 - 10088 Volpiano (TO) Italia

Tel. +39 011 98.59.117 Fax. +39 011 98.59.326

C.F. e P.I. 02258610357

[depureco@depureco.com](mailto:depureco@depureco.com) [www.depureco.com](http://www.depureco.com)