


SINGLE PHASE INDUSTRIAL VACUUMS



PERFORMANCE ON VACUUM SOLUTIONS SINCE 1972

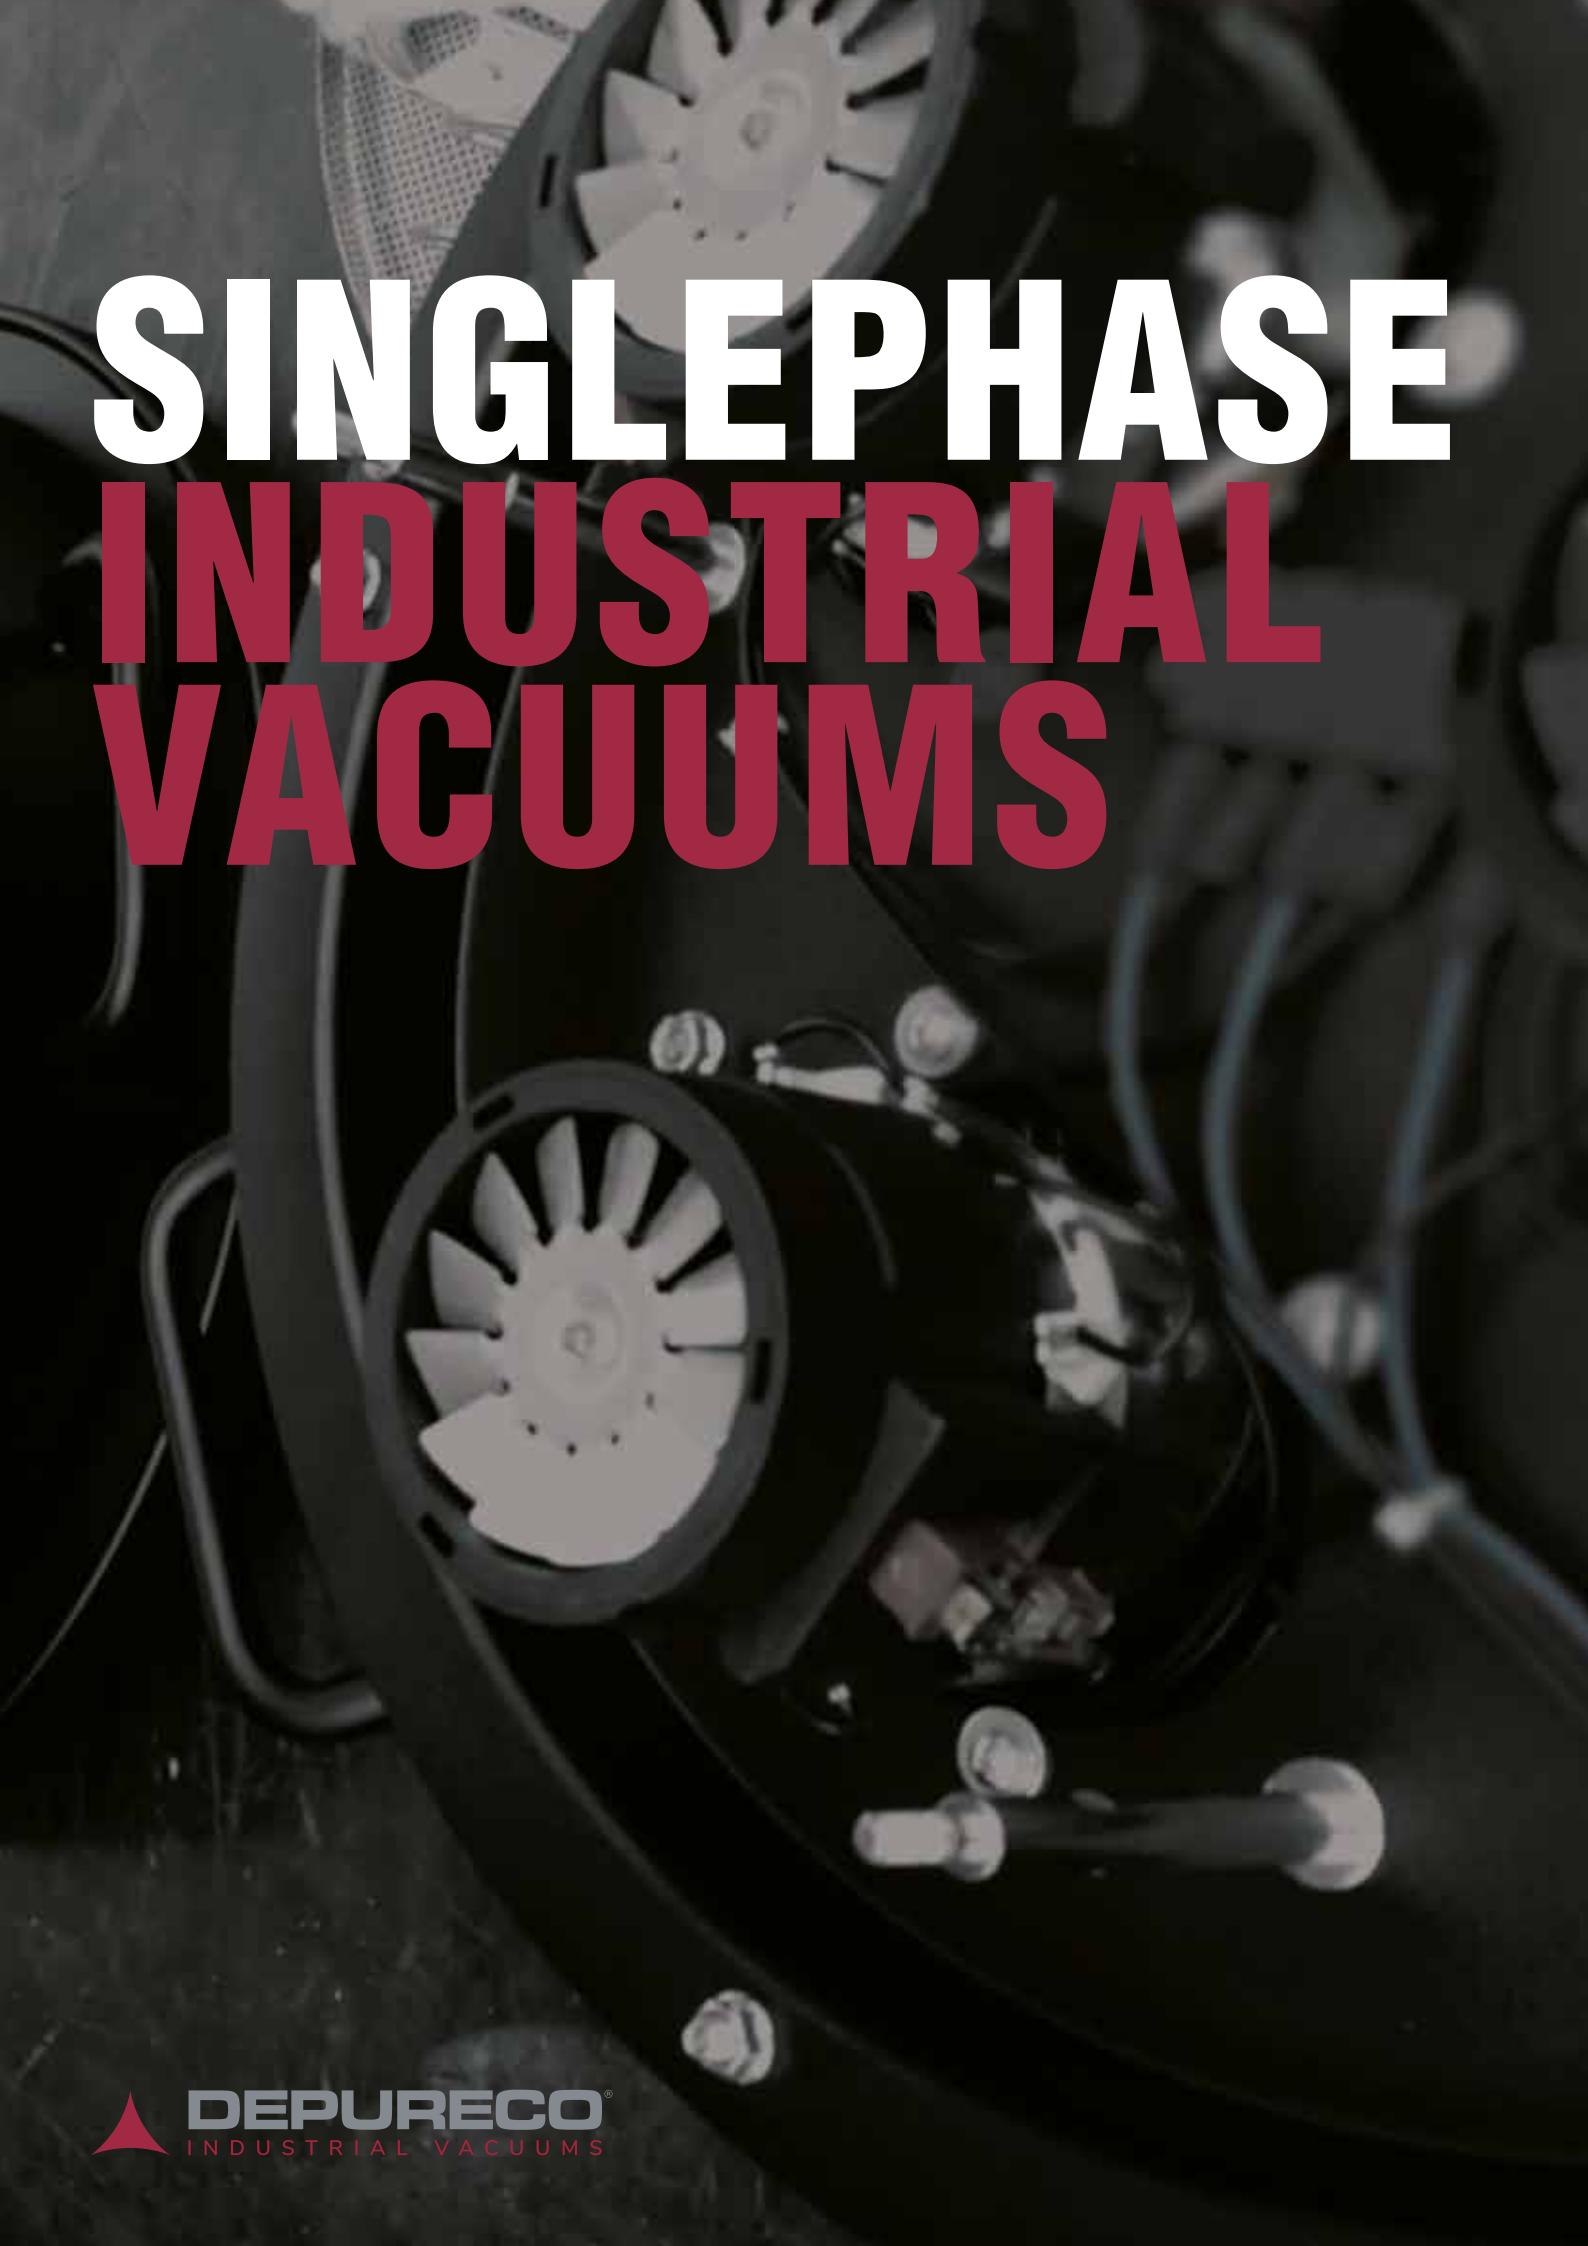

POWER
RELIABILITY
SAFETY

POWER & RELIABILITY



ADVANTAGES

MAXIMUM POWER 3,9 KW

BY-PASS COOLING SYSTEM

INDEPENDENT SWITCHES

Suitable for every need, the by-pass motors installed by Depureco are powerful and reliable. Thanks to their independent cooling system they can work in the most demanding conditions. Dust, swarf, oil and every type of liquid are quickly vacuumed, even with several meters long hoses. The three-motors version is the most powerful in its category and can reach outstanding performances.

UP TO 3 MOTORS TO REACH
THE UTMOST PERFORMANCES



THE RIGHT FILTER FOR EVERY CIRCUMSTANCE

POCKET FILTER



STANDARD M CLASS FILTER

FINE DUST, GRANULES, SOLID AND DRY SWARF



M CLASS TEFLON FILTER

FINE DUST, GRANULES, WET OR DUMP SWARF AND SOLID MATERIALS. ESPECIALLY SUITABLE FOR STICKY DUST.



M CLASS ANTISTATIC FILTER

FINE DUST, GRANULES, SWARF AND SOLID MATERIALS THAT TEND TO BECOME ELECTROSTATICALLY CHARGED. STANDARD ON THE MODELS IN THE ATEX RANGE.



M CLASS PTFE FILTER

VERY FINE AND STICKY DUST, HYGROSCOPIC AND WET MATERIALS. FOOD CERTIFIED



NOMEX FILTER

DUST AND SOLID MATERIALS WITH TEMPERATURES UP TO 250°C.



M CLASS ANTISTATIC PTFE FILTER

HYGROSCOPIC MATERIALS THAT TEND TO BECOME ELECTROSTATICALLY CHARGED. STANDARD ON MODELS IN THE ATEX RANGE. FOOD CERTIFIED.

FILTER FOR THE JETCLEAN SYSTEM



M CLASS - FILTRATION EFFICIENCY 1 μ (EN60335269)

FILTER SURFACE UP TO 35.000 cm²

JETCLEAN® FILTER CLEANING SYSTEM


ANTISTATIC POLYESTER ALUMINATED FILTER

ESPECIALLY SUITED FOR DRY, FINE AND VERY FINE DUST



CLASS H14 EN - 1822
EFFICIENCY 99,995% VERY FINE, DANGEROUS DUST WITH GRANULOMETRY <1 μ

ABSOLUTE FILTER

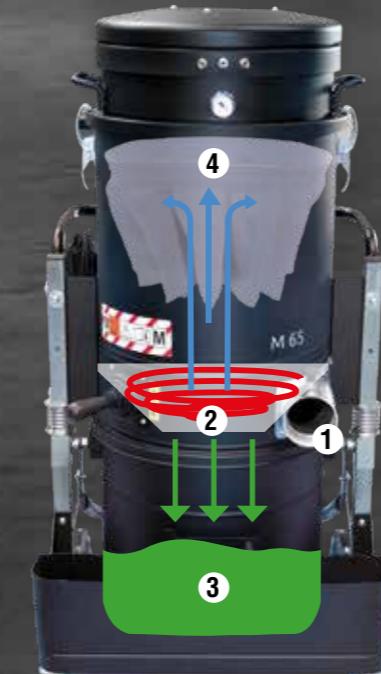

THE MATERIAL ENTERS THE CHAMBER FROM THE SUCTION INLET (1) AND THANKS TO THE CYCLONE (2) IT LOSES SPEED, SETTLING INSIDE THE VACUUM'S BIN (3). THIS WAY 90% OF THE MATERIAL IS CLEARED, GRANTING A LONGER LIFE FOR THE FILTER.


THE CYCLONE



STANDARD M CLASS FILTER

THE M CLASS FILTER HAS A FILTRATION EFFICIENCY OF 1 μ , ALLOWING TO VACUUM EVEN FINER DUST IN COMPLETE SAFETY

THE TRICK IS CLEANING THE FILTER!

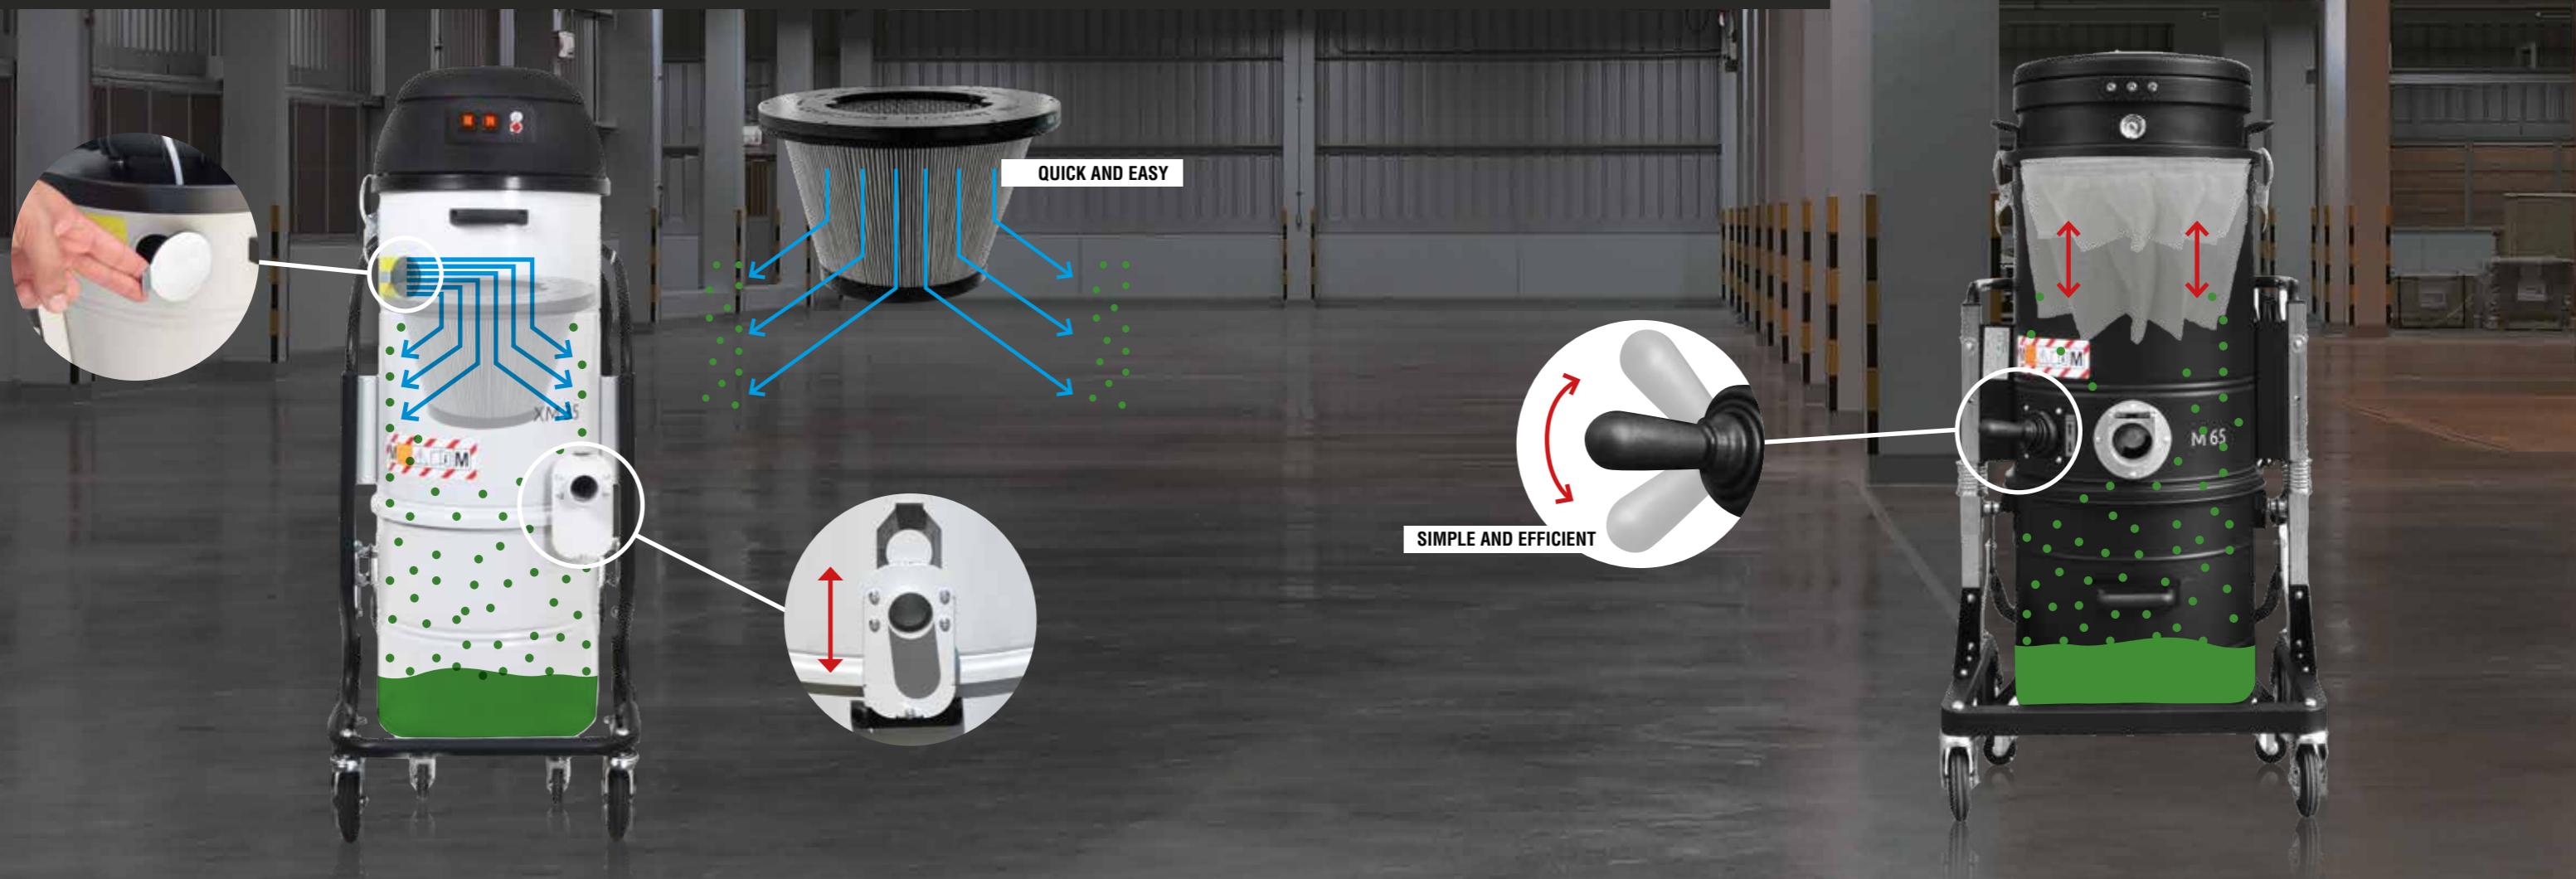

JETCLEAN® SYSTEM

IT CLEANS THE FILTER WITHOUT STOPPING THE VACUUMING

INCREASED CLEANING EFFICIENCY UP TO 30% HIGHER

IDEAL FOR FINE AND DIFFICULT DUST



MANUAL FILTER SHAKER

IDEAL FOR DRY AND HUMID DUST

EXCELLENT TO REMOVE SWARF AND SOLID MATERIALS FROM THE FILTER

PRACTICAL AND CHEAP SYSTEM

VACUUM CLEANERS WITH JETCLEAN® SYSTEM

COMPACT
DURABLE
SAFE

- Semi-Automatic filter cleaning system
- All the filters are certified M Class
- Up to 3 motors
- Powerful, Compact and Durable
- Ideal for fine and dry dust
- Practical Detachable Bin
- Up To 100 Lt Capacity
- Available With Longopac®



	XM 20 JETCLEAN	XM 35 JETCLEAN	XM 35 JETCLEAN LP	M 65 JETCLEAN	M 100 JETCLEAN LP
MOTORS	2	2	2	3	3
POWER	kW-HP 2,6 - 3,5	kW-HP 2,6 - 3,5	kW-HP 2,6 - 3,5	kW-HP 3,9 - 5,2	kW-HP 3,9 - 5,2
VOLTAGE FREQUENCY	V Hz 230 / 50-60				
MAXIMUM VACUUM	mBar 250				
MAXIMUM AIR FLOW	m³/h 380	m³/h 380	m³/h 380	m³/h 570	m³/h 570
INLET	Ø mm 50				
FILTER SURFACE	cm² 35.000				
CAPACITY	Lt 20	Lt 45	LONGOPAC®	Lt 65/100	LONGOPAC®



CONICAL FILTER CARTRIDGE

WITH STANDARD M CLASS FILTER AND
SEMI-AUTOMATIC JETCLEAN® FILTER
CLEANING SYSTEM



ABSOLUTE FILTER

AVAILABLE FOR THE
WHOLE RANGE



SLIDING DAMPER

AVAILABLE FOR
ALL MODELS



UP TO THREE YEARS
WARRANTY

VACUUM CLEANERS WITH POCKET FILTER

POWERFUL

VERSATILE

RELIABLE

- Manual Filter Shaker
- All the Filters are certified M Class
- Up to 3 motors
- Sturdy, Safe, suitable for every need
- Ideal for Dust, Granules and Swarf
- Practical detachable Bin
- Up To 100 Lt Capacity
- Available With Longopac®



MINIBULL

MOTORS	2
POWER	kW-HP
VOLTAGE FREQUENCY	V Hz
MAXIMUM VACUUM	mBar
MAXIMUM AIR FLOW	m ³ /h
INLET	Ø mm
FILTER SURFACE	cm ²
CAPACITY	Lt

M 65 / 100

kW-HP	3
V Hz	3,9 - 5,2
mBar	230 / 50 - 60
m ³ /h	250
Ø mm	570
cm ²	70
Lt	24.000 / 38.000

BULL UNO 2 M / 3M

2 / 3
kW-HP
V Hz
mBar
m ³ /h
Ø mm
cm ²
Lt



STANDARD M CLASS POCKET FILTER
SUITABLE FOR EVERY NEED

STANDARD M CLASS ANTISTATIC NOMEX M CLASS ANTISTATIC PTFE PTFE ANTISTATIC



ABSOLUTE FILTER
AVAILABLE FOR THE
WHOLE RANGE



SP SYSTEM

AUTOMATIC REVERSE AIR JET
FILTER CLEANING. AVAILABLE
ON DEMAND.

3
YEARS
WARRANTY

UP TO THREE YEARS
WARRANTY

WD VACUUM CLEANER FOR LIQUIDS

ACCESSORIES

WD 132 | WD 132 P | WD 133

	WD 132	WD 132 P	WD 133	
MOTORS	2	2	3	
POWER	kW-HP	2,6-3,5	2,6 - 3,5	3,9 - 5,2
VOLTAGE FREQUENCY	V Hz	230/50-60	230/50-60	230/50-60
MAXIMUM VACUUM	mBar	250	250	250
MAXIMUM AIR FLOW	m³/h	380	380	570
INLET	Ø mm	70	70	70
CAPACITY	Lt	130	130	130
DISCHARGE SYSTEM		discharge by gravity	automatic discharge by pump	discharge by gravity


FLOATING SYSTEM



STANDARD FILTER FOR LIQUIDS



STANDARD FILTER FOR DUST

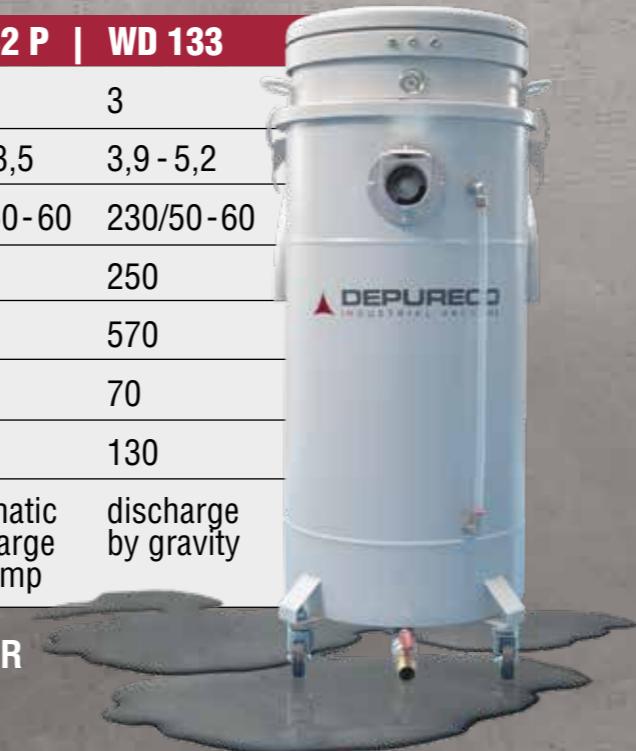

CONVENIENT SOLUTIONS TO
HELP YOU WITH YOUR WORK



FIXED VACUUMING TOOL



BIN EMPTYING KIT



LONGOPAC®
SEPARATOR



WET & DRY
SEPARATOR



TIITLE 580 LT
SEPARATOR

THE RIGHT ACCESSORY FOR EVERY NEED



DOUBLE BEND TUBE
FOR FLOOR BRUSH



FLOOR BRUSH
WITH BRISTLES



FLOOR SQUEEZE WITH
RUBBER STRIPS



SCRAPING PIPE



PIPE WITH HANDLE



ANTISTATIC RUBBER
CONIC SECTION



OIL PROOF
CONIC SECTION



SILICONE CONIC
SECTION



ANTISTATIC
SWEEPER NOZZLE



ANTISTATIC
BRUSH
WITH BRASS BRISTLES



ANTISTATIC RUBBER BRUSH
WITH BRASS BRISTLES



PVC ROUND BRUSH



ANTISTATIC BENT
RUBBER CONE



PIPE CLEANING BRUSH



ANTISTATIC FLAT PIPE

FLEXIBLE HOSES FOR ALL MATERIALS



BLACK EVAFLEX HOSE



BLACK EVAFLEX
ELECTROCONDUCTIVE HOSE



POLYURETHANE
FLEXIBLE HOSE



REINFORCED ABRASIVE PROOF
POLYURETHANE FLEXIBLE HOSE




ANTISTATIC POLYURETHANE
FLEXIBLE HOSE



BULL 24 | FOX 24

	BULL 24	FOX 24	
MOTORS	3	3	
POWER	kW-HP	1,5/2	1,5/2
VOLTAGE FREQUENCY	V	24	24
MAXIMUM VACUUM	mBar	240	240
MAXIMUM AIR FLOW	m³/h	350	350
INLET	Ø mm	80	80
BATTERY	N°	2	4
UPTIME	h	1	2

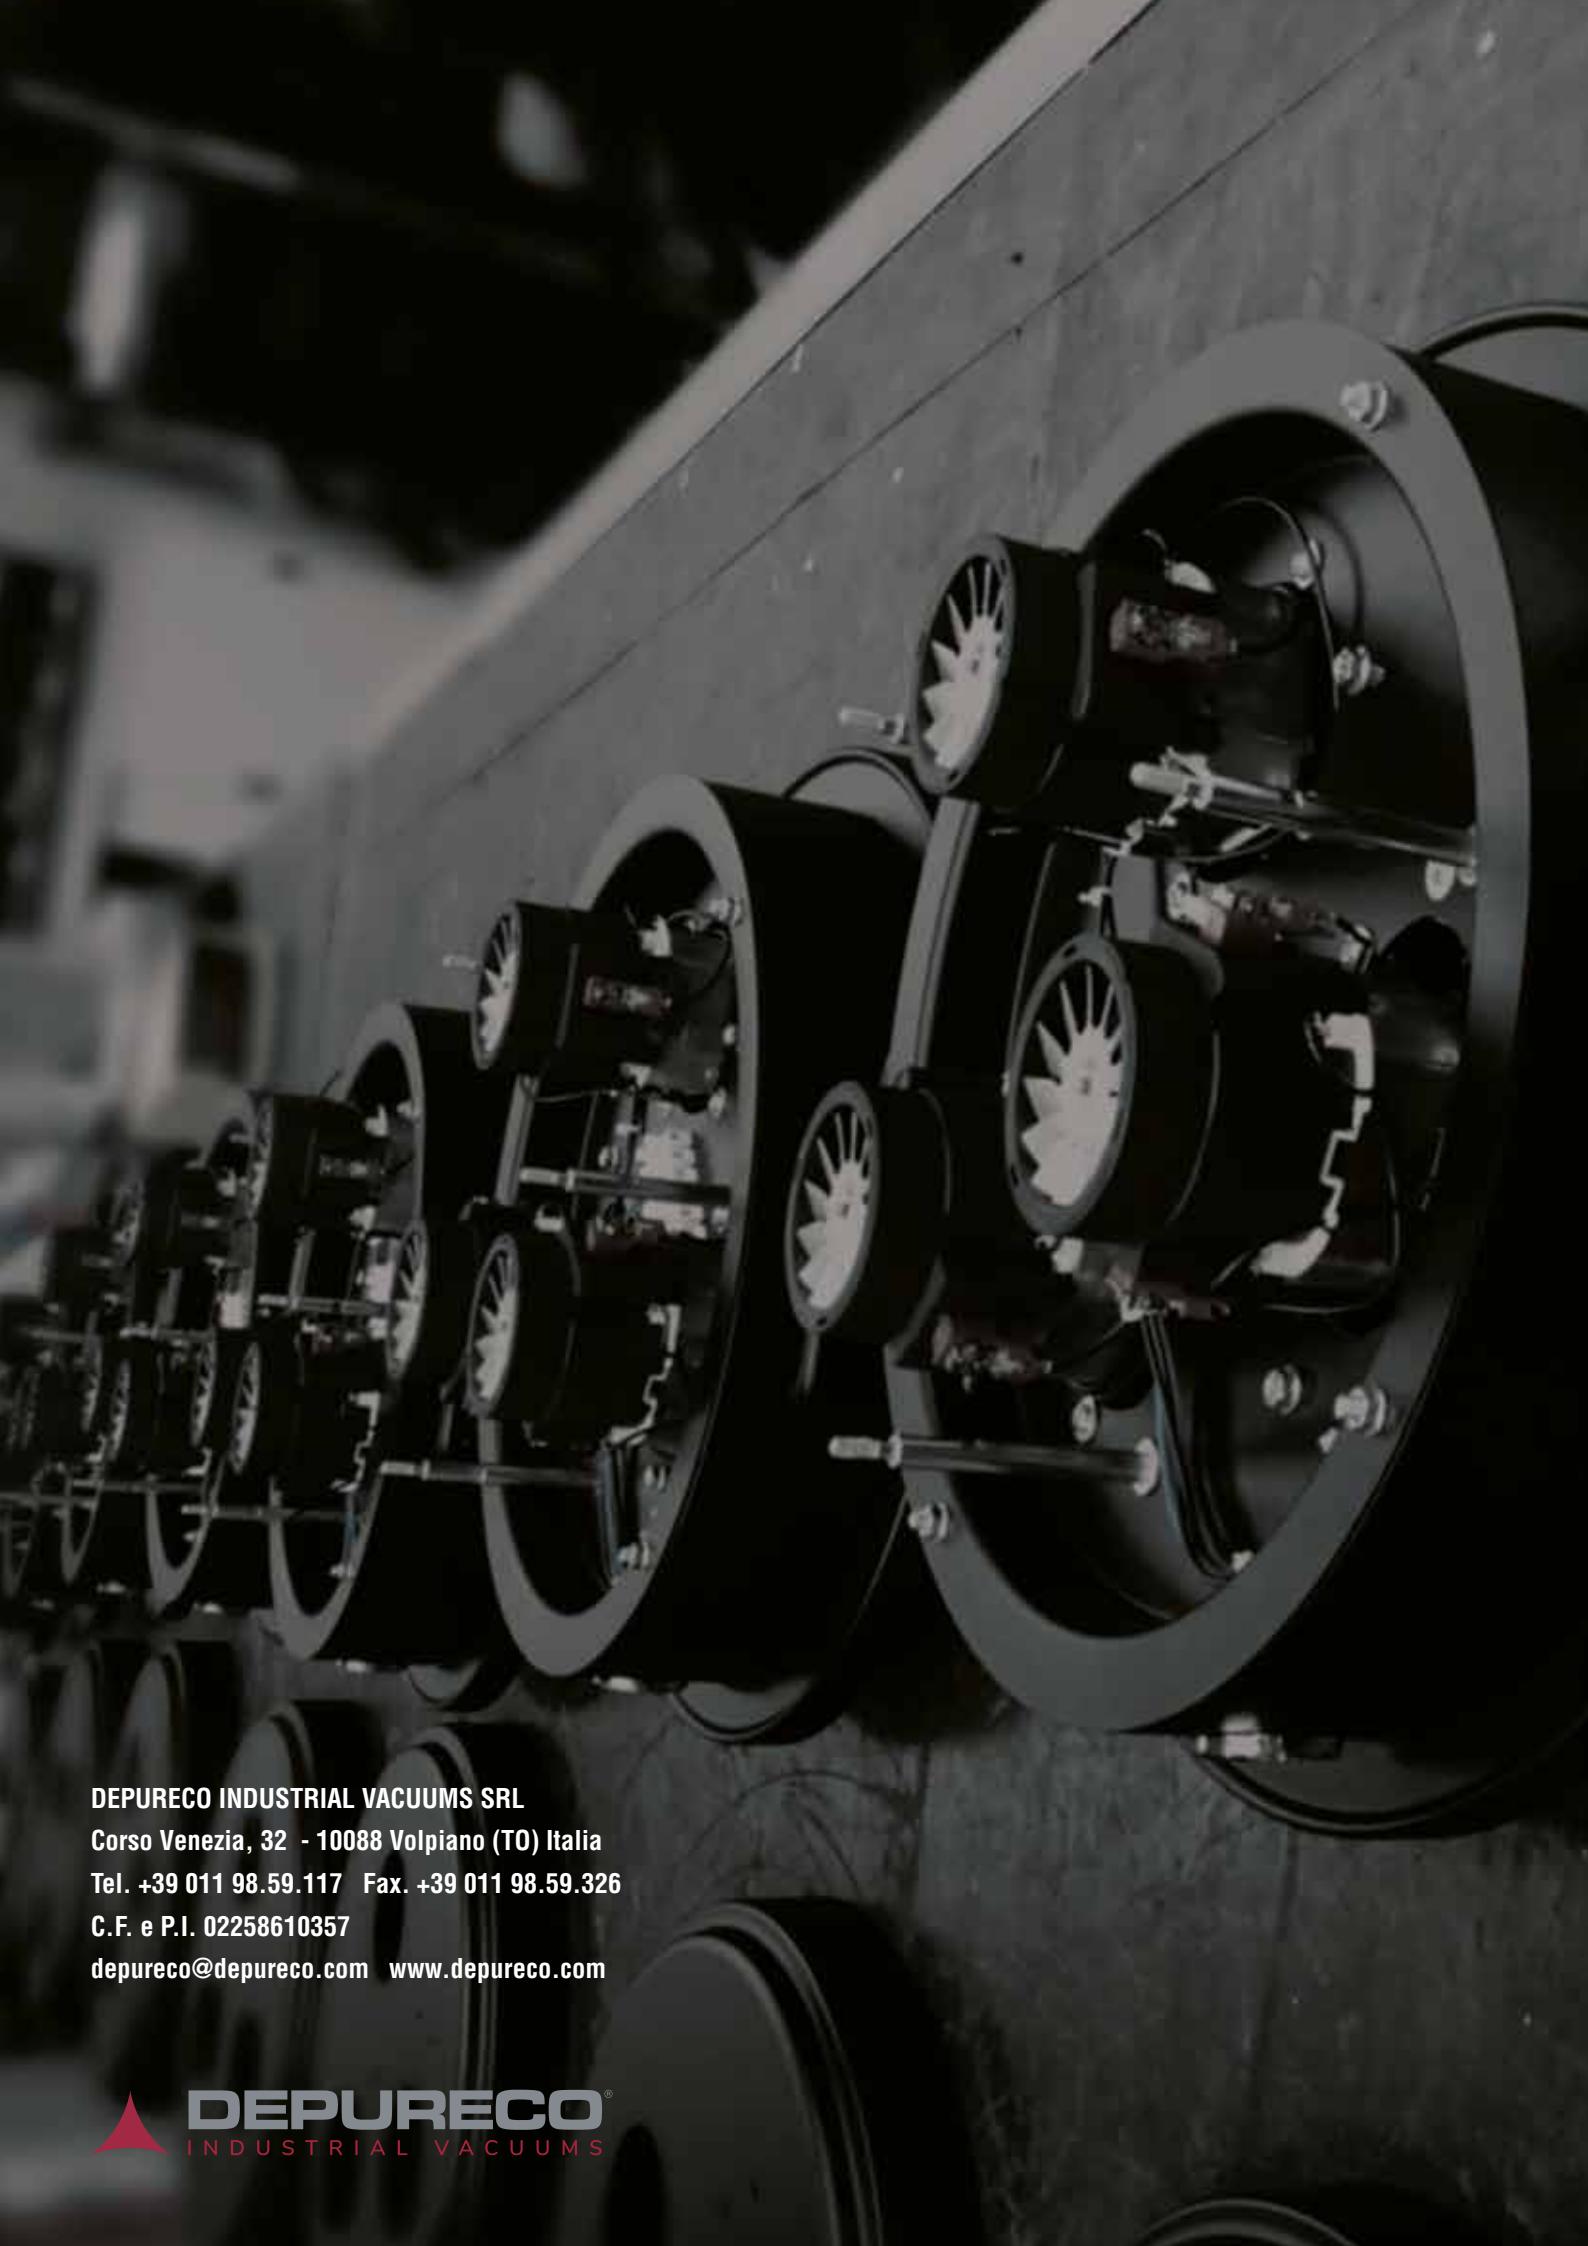

DEPURECO INDUSTRIAL VACUUMS SRL

Corso Venezia, 32 - 10088 Volpiano (TO) Italia

Tel. +39 011 98.59.117 Fax. +39 011 98.59.326

C.F. e P.I. 02258610357

depureco@depureco.com www.depureco.com